

# Crackled



200 Compose




300 Imagine



400 Sculpt



500 Shape



505 Model



700 Construct



705 Form



800 Produce




510 Create

Style Name	<b>Crackled</b>	
Collection Name	<b>Surface Works</b>	
Style Number	<b>54871</b>	
Product Type	<b>Soft Surface - Philadelphia</b>	
Construction	<b>Multi-Level Pattern Loop</b>	
Fiber	<b>100% Eco Solution Q<sup>®</sup> Nylon</b>	
Dye Method	<b>Solution Dyed</b>	
Primary Backing	<b>Synthetic</b>	
Secondary Backing	<b>Strataworx</b>	
Traffic Rating	<b>Heavy</b>	
Protective Treatments	<b>SSP Shaw Soil Protection</b>	
	U.S.	Metric
Product Size	<b>24 in x 24 in</b>	<b>6096 cm x 6096 cm</b>
Area Per Carton	<b>80 ft<sup>2</sup></b>	<b>743 m<sup>2</sup></b>
Pieces Per Carton	<b>20</b>	
Gauge	<b>1/10 in</b>	<b>3937 per 10 cm</b>
Stitches	<b>10 per in</b>	<b>39 per 10 cm</b>
Finished Pile Thickness	<b>0.088 in</b>	<b>2.24 mm</b>
Average Density	<b>6545 oz/yd<sup>3</sup></b>	
Total Thickness	<b>0.23 in</b>	<b>5.84 mm</b>
Tufted Weight	<b>16 oz/yd<sup>2</sup></b>	<b>542.5 g/m<sup>2</sup></b>



## Recommended Installation Methods

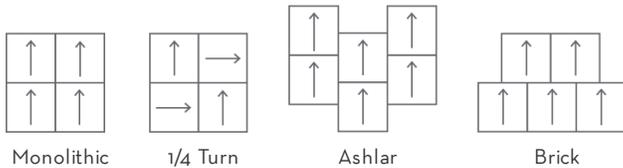

## Performance Testing

Pill Test	<b>Pass</b>
Radiant Panel	<b>Class I</b>
NBS Smoke	<b>Less than 450</b>
Electrostatic Propensity	<b>Less than 3.5 kv</b>
CRI Greenlabel Plus	<b>GLP2671</b>
ADA Compliance	<b>&gt;0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes</b>

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

## Warranties

**Carpet Tile 15 year Commercial Limited Warranty with Stain and Color for StrataWorx**

## Environmental

Environmental Product Declaration (EPD)	<b>3rd Party Certified in Accordance with ISO14044, ISO14025 &amp; EN15804</b>
Recycled Content	<b>Pre-consumer - 23%, Post-consumer - 0%</b>

Specifications are subject to nominal manufacturing variance.